


Valores acústicos


WIREFRAME / WIREFRAME EXPRESSIONS



Absorción del sonido (ISO 354)	Impacto del sonido (ISO 140-8 / ISO 10140-3)
Wireframe / Wireframe Expressions Comfort Lite® α_w 0.30 Clase D	Wireframe / Wireframe Expressions Comfort Lite® ΔL_w 32dB

Coefficiente de absorción del sonido Alpha α_s

Frecuencia (Hz)	Comfort Lite® α_s
100	0.02
125	0.03
160	0.04
200	0.04
250	0.05
315	0.09
400	0.17
500	0.38
630	0.39
800	0.26
1000	0.23
1250	0.24
1600	0.25
2000	0.28
2500	0.30
3150	0.33
4000	0.37
5000	0.40

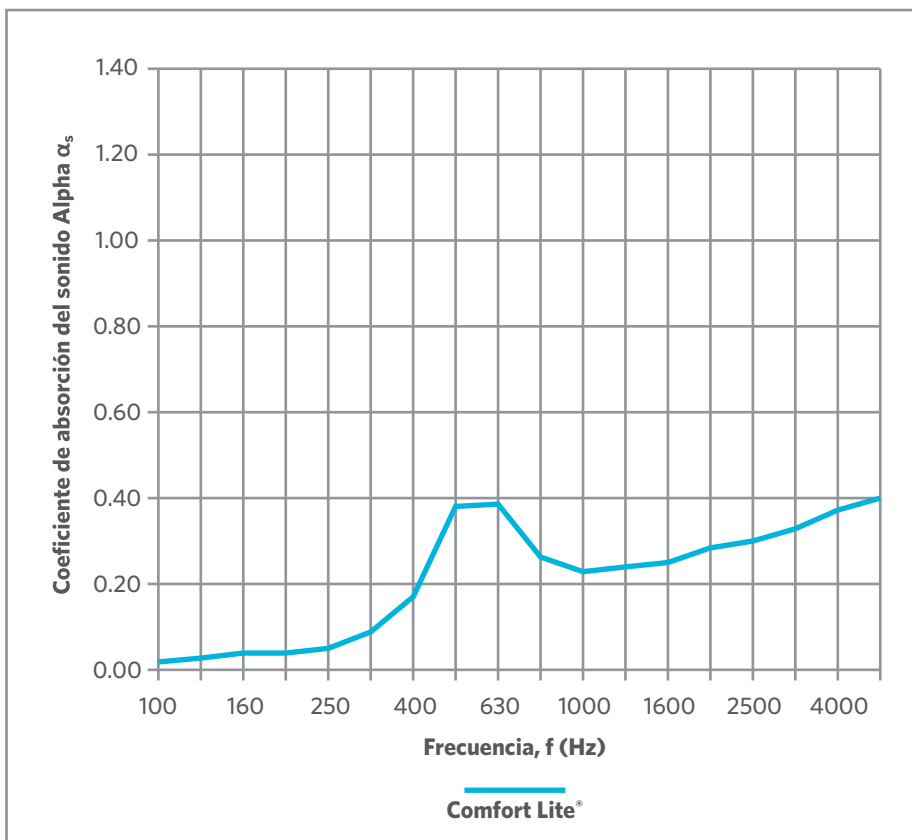

α_p Valores (Comfort Lite®)					
125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
0.05	0.05	0.30	0.25	0.30	0.35

α_w	Clase
(valor global) 0.30	D